


# Electrical Wiring

Insulate both connections (electrical tape, silicone, etc.)

Electrical connections may be made with the Calorique foil crimp connector.


High power (watt) density applications require at least one high limit thermostat which may be used in conjunction with a process control thermostat

Thermostat may be any conventional type: thermocouple, capillary tube, thermal resistor, etc.

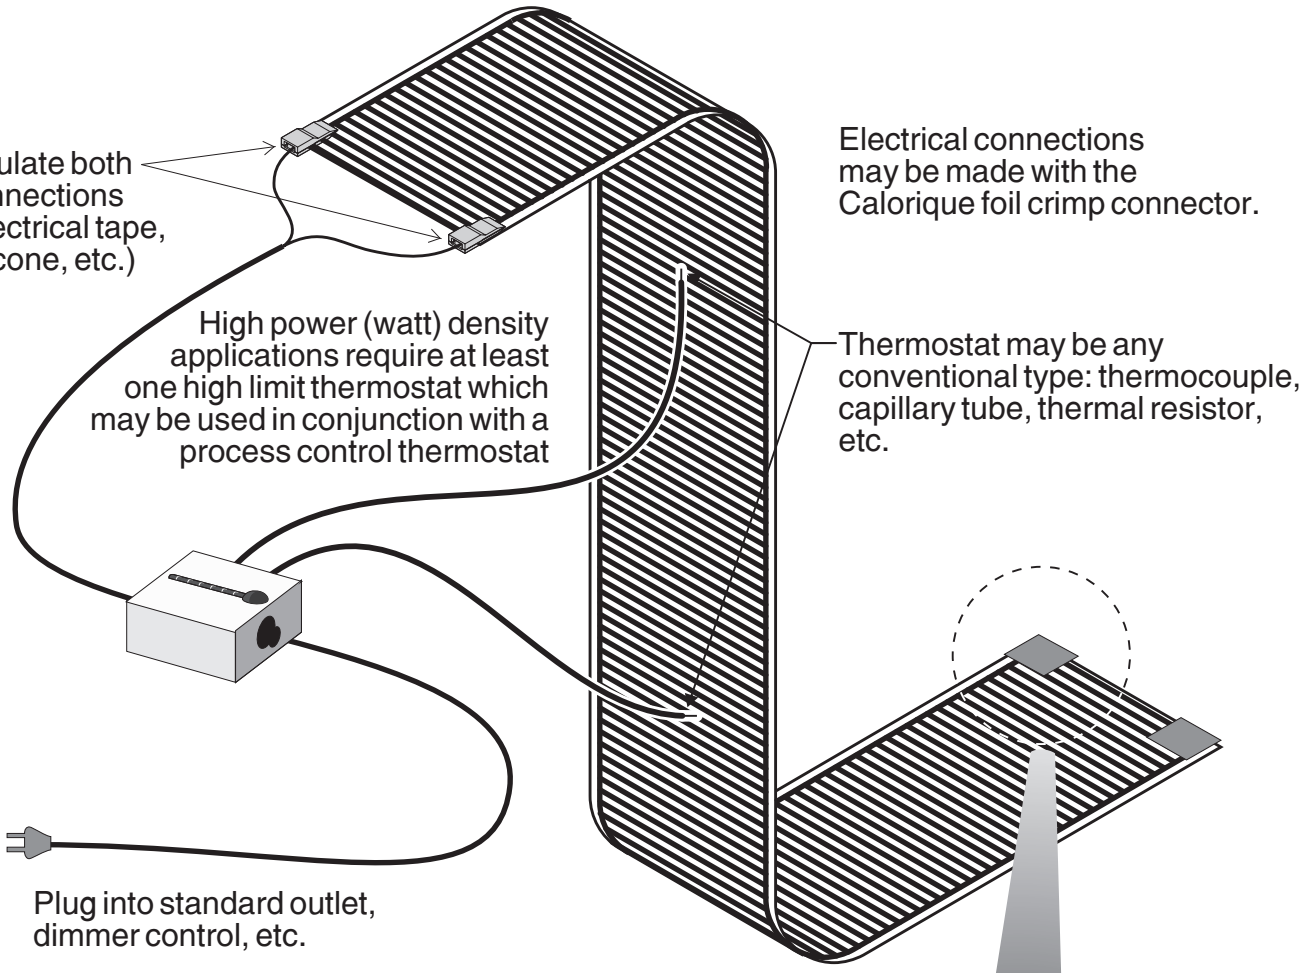

Plug into standard outlet, dimmer control, etc.

Cut panelized elements only along the dashed "cut here" line.

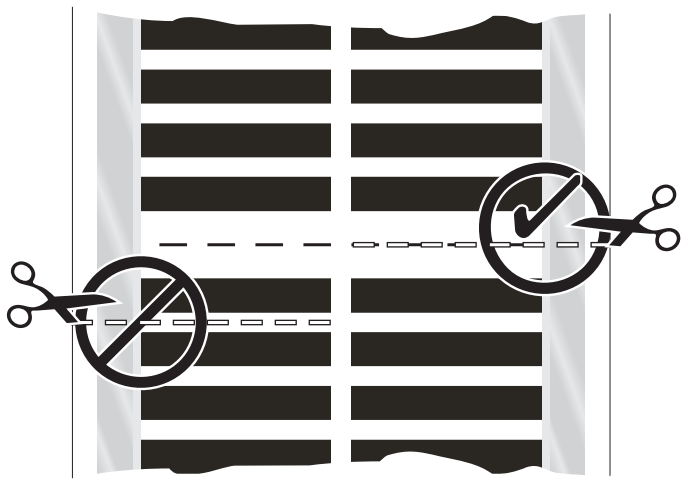

Do no cut through any heating stripe.

